

Top view


Treble-side stud position relative to the string centerline is the lateral reference.
The straight FlowTrem2 bass-side knife edge accommodates minor variations in stud spacing.

Side view

Body thickness shown for reference only.

Bottom view

Routing templates

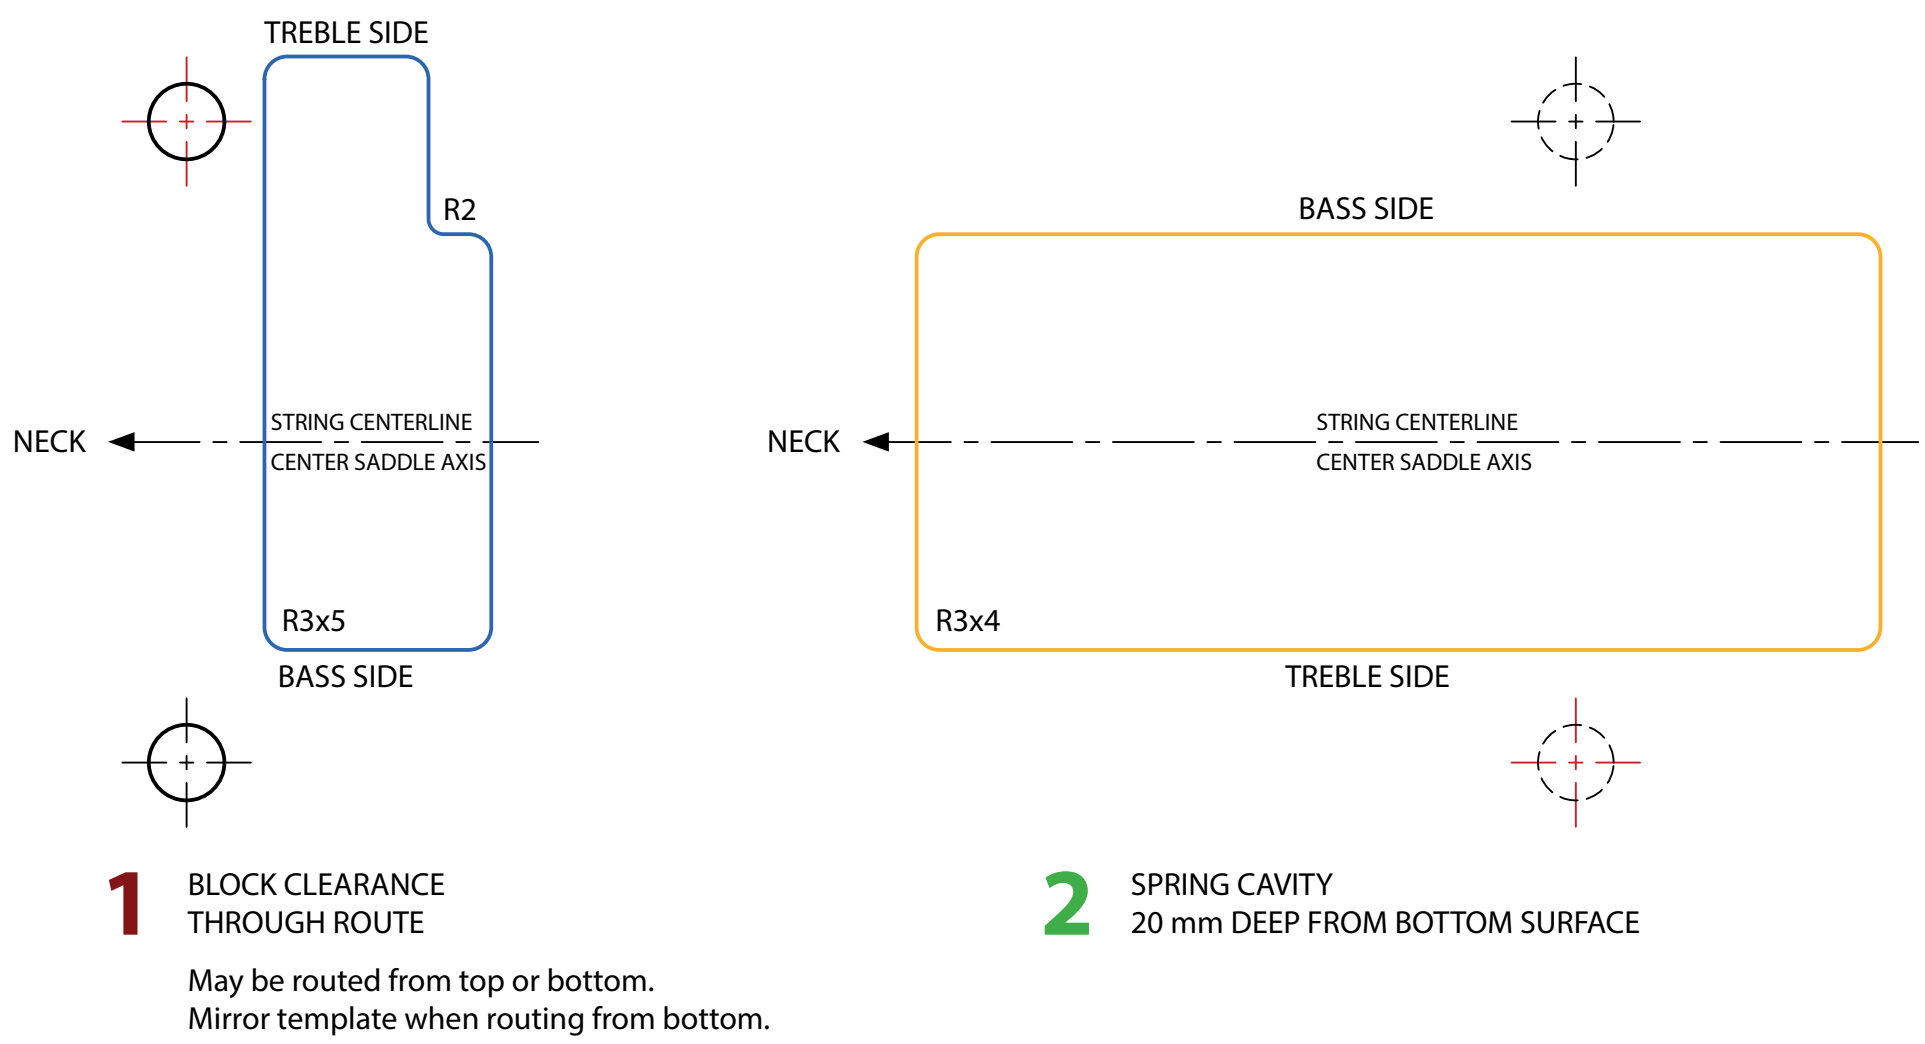

STANDARD BUSHING MOUNTING

2x Ø10.0 mm, 20 mm DEEP FROM TOP SURFACE

Ø10.0 mm recommended bore diameter.
For softer woods, Ø9.8 mm may be appropriate;
verify press fit before installation.

OPTIONAL WOOD-SCREW STUD MOUNTING

Ø6.9 mm x 9.5 mm DEEP COUNTERBORE
Ø4.4 mm x 35 mm DEEP PILOT HOLE


Depths measured from top surface.
Recommended only for dense, structurally sound body woods.

VERIFY BODY THICKNESS BEFORE DRILLING.
DO NOT DRILL THROUGH THE BACK SURFACE.

Download routing drawings and DXF files:


<https://knowledge.kissmystrings.com/installation-setup/flowtrem2-routing-files>

Visual reference only — not to scale. Dimensions and routing templates govern.

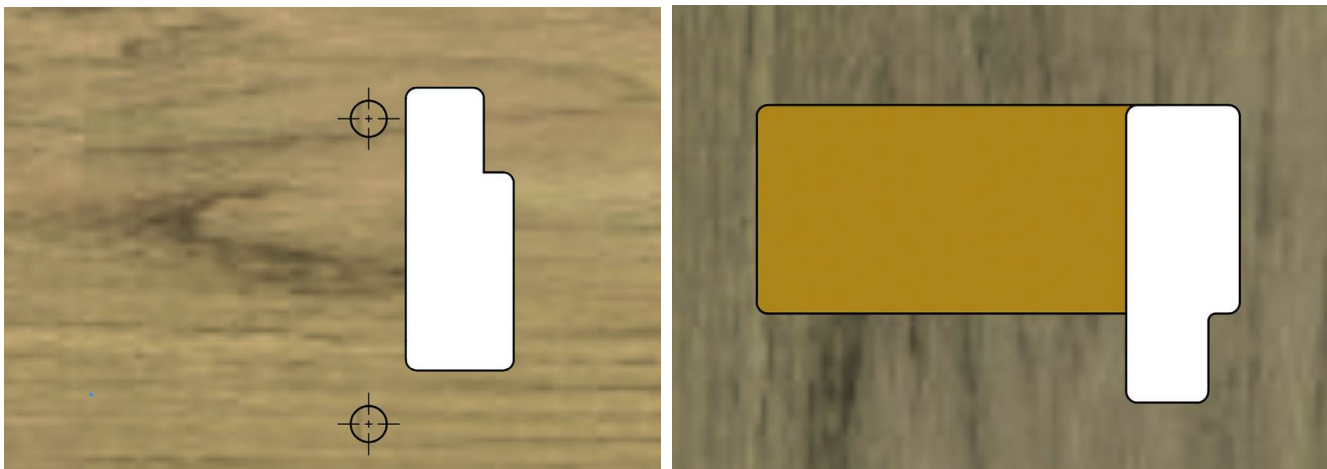

Top view

Bottom view

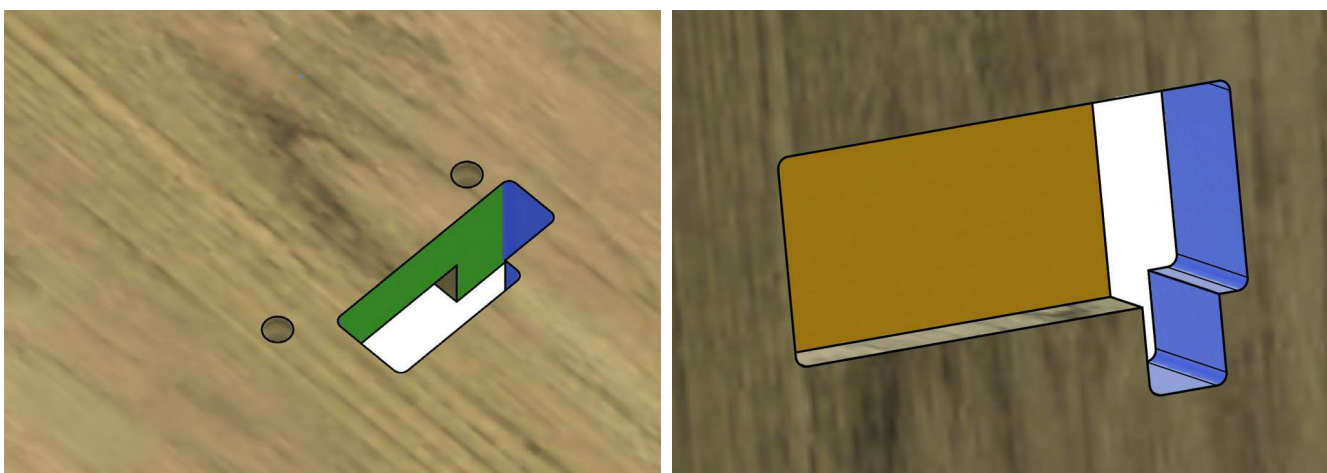

Top view, angled

Bottom view, angled

DIMENSIONS IN mm
TEMPLATES SCALE 1:1 - PRINT AT 100% / ACTUAL SIZE
VERIFY SCALE BEFORE ROUTING - DIMENSIONS GOVERN

100 mm SCALE CHECK

 Legal Owner KMS - KISS MY STRINGS Germany kissmystrings.de		Date 2026-09-04	Released by Marcus Maly		
		Document type Routing / Installation Drawing	Document status RELEASED		
		Title FlowTrem2 7-String Top-Mount Routing	DWG No. FT2-7-RT-Top		
		Rev. 01	Scale AS SHOWN	Sheet 1/1	